



# ST-15C

## Single Point Overfill Prevention Controller

Featuring Dynacheck® – Automatic and Continuous Self-Checking Circuitry

### DESCRIPTION

The Scully single point overfill prevention controllers feature two-wire optic or thermistor sensing. They are mounted at a loading rack or fill station for connection to a single compartment tank vehicle.

For additional static bond/ground proving options, the system works in conjunction with the Scully ST-47 Groundhog Self-Proving Earthing Verification System.




ST-15C



### FEATURES AND BENEFITS

- Maximum safety with Dynacheck® automatic and continuous self-checking circuitry.
- Will not permit loading under any fault or wet sensor conditions.
- Signals for automatic shut-off of product flow within a half-second of detecting an overfill condition.
- Ideal overfill prevention for refuelers, rail tank cars, tank trucks, chemical trailers and other one compartment vehicles.
- 30 years of proven, dependable performance.
- Easy connection to vehicles with versatile high impact plug and cable units.
- ATEX, IECEx and UKEX Approved. SIL 3 capable.

Technical Diagram of Model ST-15C ELK  
All Dimensions in Millimeters (Inches in Parenthesis)

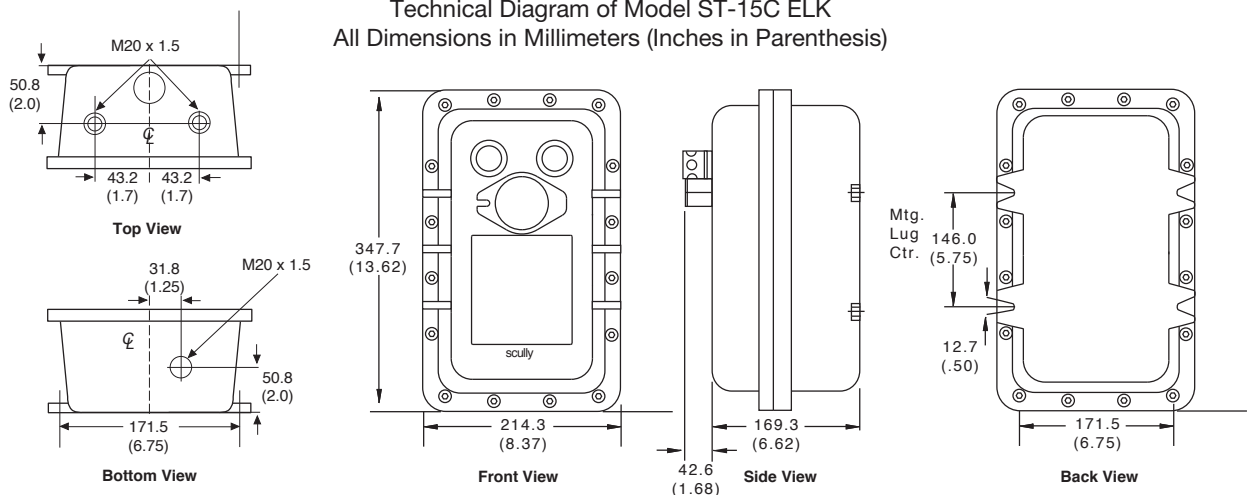

# Single Point Overfill Prevention Controller

## TECHNICAL SPECIFICATIONS

**Approved Versions of:** Thermistor Sensors SP-BLK, SP-BLUK, SP-BLHK  
Two-Wire Optic Sensors, SP-TO, SP-TO(SS), SP-TO(SS)HP, SP-IO, SP-IR.

**Enclosure:** Explosion-proof, weathertight.  
Corrosion inhibiting epoxy paint optional.

**Indicator Lamps:** Red = Power On/Non-Permit.  
Green = Permit.

**Approvals:** BAS22UKEX0024X  
IECEX BAS 22.0011X  
Ex db [ia Ga] mb IIB Gb  
(Tamb -40°C to +60°C)



**Turn on response time:** 6 – 30 seconds (typical) for thermistors. Two-wire optics turn on instantly.

**Shutdown Response Time:** Less than 1 second.

**Power Requirements:** ST-15–240 Models: 200–250 VAC, 50/60 Hz. 20 Watts maximum.

ST-15–120 Models: 100–130 VAC, 50/60 Hz. 20 Watts maximum.

**Connections:** Provided by internal terminal strips.

**Output Control:** One normally open volt free contact, rated 250 VAC, 5A resistive.

**Output Control Fuse:** Internal 5A.

**Weight:** 12.7 kg (28 lbs.).

**NOTE:** The Scully ST-15C is an Intrinsically Safe system. For maximum safety, it should be used only in conjunction with sensors manufactured by Scully not to jeopardize the conditions of the approvals.



ORDERING INFORMATION		
Model	Description	Part Number
ST-15C-240-ELK	Single Point Controller with Explosion-proof Housing, Indicator Lamps, Lockable Bypass Switch, 240VAC	08631
ST-15C-240-EL	Single Point Controller with Explosion-proof Housing, Indicator Lamps, 240VAC	08633
ST-15C-120-ELK	Single Point Controller with Explosion-proof Housing, Indicator Lamps, 120VAC	09631
REPLACEMENT PARTS		
Model	Description	Part Number
Module Assembly	ST-15C-240 Single Point Controller	08656
Module Assembly	ST-15C-120 Single Point Controller	08756
Fuse	1A, Main Fuse	26343
Fuse	5A, Relay Contact Fuse	26350
Replacement Light	Explosion Proof, Green, LED Style, 240V	09420
Replacement Light	Explosion Proof, Red, LED Style, 240V	09421
Replacement Bulb	6W, 240V	27065
Lock Box	Lock Box replacement parts (ST-15C/35C)	08360
Bypass switch operator	3 Position	26055
Contact Block	Bypass switch	26022

Copyright © 2024 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Test, Faylsafe, IntelliCheck, Intellitrol, Intelliview, Load Anywhere, Maxsafety, Sculcon, and V.I.P. are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

01-2A  
February 2024

 **Scully Signal Company**  
800 272 8559  
sales@scully.com  
Wilmington, MA, USA

**Scully Systems Europe NV**  
+32 (0) 15 56 00 70  
sales@scully.be  
Mechelen, Belgium

**Scully UK Ltd**  
+44 (0) 1606 553805  
sales@scullyuk.com  
Winsford Cheshire, UK

**Scully Systems India**  
+91 9821799566  
salesindia@scully.com  
Maharashtra, India

Dynamic Self-Testing® Overfill Prevention Systems

