



# ScuL-Sense™ Stainless Steel High Pressure Chemical Sensor

Liquid Level Sensor for Chemical Industries

Featuring Dynacheck® – Automatic and Continuous Self-Checking Circuitry



## Chemical Sensor

The ScuL-Sense™ design is API/ATEX compliant and withstands temperature related stresses, dramatically improving reliability across a wide operating range.

## DESCRIPTION

Scully ScuL-Sense™ stainless steel optic sensors are designed for Chemical product overflow prevention and point level detection.

Scully offers a 5-year warranty on these models of overflow prevention sensors for fixed tank trailer and storage tank applications. Scully sensors have the longest running safety record in the industry and are manufactured in Scully's U.S. factory, which prides itself on its strict quality and safety standards.

They are designed to be used with the Scully Intellitrol®, ST-15C, and/or ST-35C series loading rack control monitors. They can be used for overflow prevention on road tankers, rail cars and storage tanks.

These chemical sensors are available in either 2 wire or 5 wire versions. The sensors are a critical component in Scully's unique and patented Dynacheck® circuit design. When used in conjunction with Scully electronic monitoring equipment, our overflow protection sensor will provide consistent failsafe monitoring. By constantly checking a "closed loop" pulsing signal across the entire system, Scully ensures a safe and reliable loading operation. If rising fuel contacts the sensor, this signal is interrupted and the controlling pumps and valves are shutdown. No operator involvement is needed to end the loading operation.

Scully stainless steel chemical sensors are constructed of SS 316 Stainless Steel, Borosilicate (Pyrex® Glass) and SIMRIZ® O-rings and are compatible with a wide range of chemicals.\*

## FEATURES AND BENEFITS

- Maximum safety with Dynacheck® – Automatic and continuous self-checking circuitry when used with Scully loading rack controls and vehicle onboard monitors.
- Usable to pressures of 600 PSI.
- Broad chemical compatibility.
- Wide temperature range.
- Shaft threaded inside and out and incorporates wrench flats.
- Fully compatible with Scully controllers.
- ATEX, IECEx and UKEX approved.
- Can be employed as part of a SIL system.



## IEC 61508 SIL 3 Capable

### 2 Wire Model

$\lambda_{DU}=2.0 \text{ FIT}^*$     $\lambda_{SU}=110 \text{ FIT}^*$

### 5 Wire Model

$\lambda_{DU}=1.0 \text{ FIT}^*$     $\lambda_{SU}=116 \text{ FIT}^*$

\*FIT = Failure In Time ( $1 \times 10^{-9}$  failures per hour)

## CHEMICAL COMPATIBILITY


Compatible products include:  
(not a complete list)

- |                            |                     |                             |
|----------------------------|---------------------|-----------------------------|
| ■ Gasoline                 | ■ Alcohols          | ■ Nitric Acid               |
| ■ Jet Fuel (JP3, JP4, JP5) | ■ Sodium Peroxide   | ■ Acetic Acid Glacial       |
| ■ Fuel Oils                | ■ Hydrogen Peroxide | ■ Stearic Acid              |
| ■ Oils                     | ■ Mineral Spirits   | ■ Methyl Ethyl Ketone (MEK) |
| ■ Ethanol                  | ■ Arsenic Acid      | ■ Phosphorus Trichloride    |
|                            | ■ Boric Acid        | ■ Methyl Bromide            |
|                            | ■ Carbonic Acid     |                             |

\*NOTE: Compatibility is based on compatibility with sensor components. In rare cases, optical properties of the chemical may interfere with proper operation. Always perform operational tests before deploying.



# Liquid Level Sensor for Chemical Industries

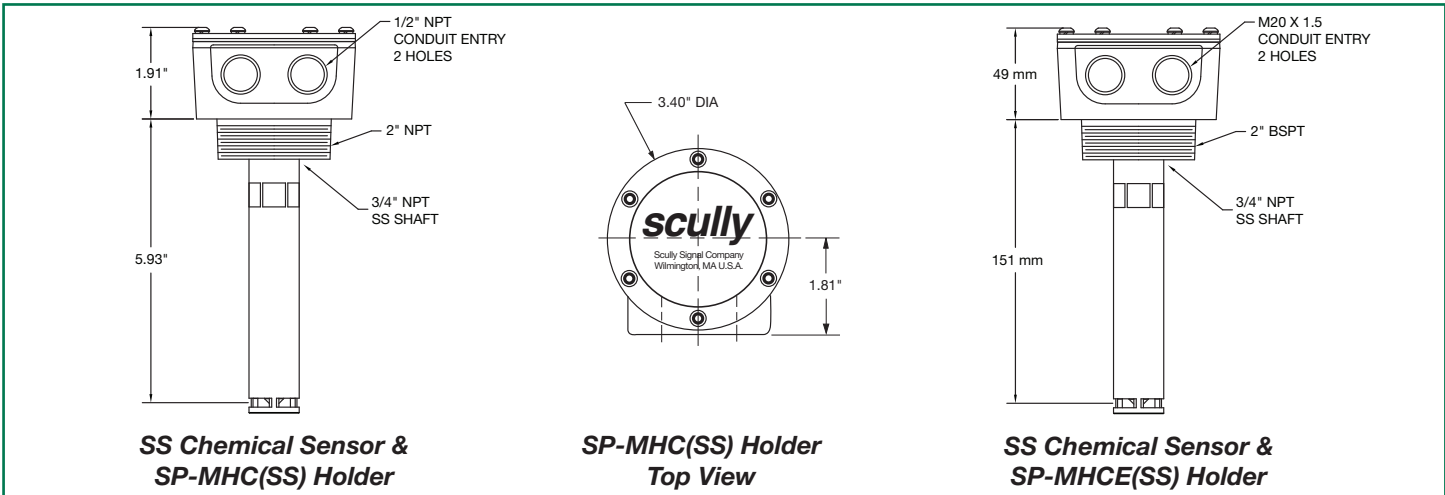

## TECHNICAL SPECIFICATIONS

**Temperature Range:** -40°C to +60°C (-40° F to +140° F).  
**Product Range:** IIB hazardous materials and non-hazardous materials which are compatible with optic sensing technology. Consult the factory for specific chemical compatibility.  
**Exposed Materials:** SS 316 Stainless Steel, Borosilicate (Pyrex®) Glass, SIMRIZ® Seal.  
**Detection Level and Size:** Fixed, refer to diagram. The sensor may be adjusted to any length using 3/4" stainless steel pipe and a pipe coupling.  
**Level Repeatability:** 1 mm (±1/16").

**Electrical Leads:** 91cm (36") long Teflon insulated wires, 0.33mm<sup>2</sup> (#22 AWG).  
**Cable Entry:** Two holes, M20x1.5 or 1/2" NPT Threads.  
**Weight:** Sensor: 0.45kg (15.5oz). Holder: 1.27kg (2.8 lbs).  
**Approvals:**  
 SP-FU: UL21ATEX2635X  
 IECExUL21.0113X  
 UL22UKEX2272X  
 II 1 G Ex ia IIB T5 Ga  
 SP-TO & IR: UL21ATEX2636X  
 IECExUL21.0114X  
 UL22UKEX2273X  
 II 1 G Ex ia IIB T5 Ga



Model	Description	Part Number
SP-TO(SS)	Two-Wire Optic Stainless Steel Chemical Sensor only	09375L1
SP-FU(SS)	Five-Wire Optic Stainless Steel Chemical Sensor only	09376L1
SP-FU(SS)	"E" Five-Wire Optic Stainless Steel Chemical Sensor only (EN13922 wire colours)	09376EL1
SP-MHC(SS)	Stainless Steel Holder assembly with 3/4" NPT thread (no sensor)	08585
SP-MHCE(SS)	Stainless Steel Holder assembly with 3/4" NPT, 2" BSPT, M20 (no sensor)	09477

Copyright © 2023 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice. SIMRIZ® is a registered trademark of FREUDENBERG-NOK. Pyrex® is a registered trademark of Corning.

02-2A  
 June 2023

**scully**  
 800 272 8559  
 sales@scully.com  
 Wilmington, MA, USA

**Scully Systems Europe NV**  
 +32 (0) 15 56 00 70  
 sales@scully.be  
 Mechelen, Belgium

**Scully UK Ltd**  
 +44 (0) 1606 553805  
 sales@scullyuk.com  
 Winsford Cheshire, UK

**Scully Systems India**  
 +91 9821 799566  
 salesindia@scully.com  
 Maharashtra, India

Dynamic Self-Testing® Overfill Prevention Systems

