



ST-15C-WX Series Overfill Prevention Control Units for Storage Tanks

Multiple-Point Liquid-Level Detection System for High and Low Level Warning and Spill Prevention

Featuring Dynacheck® – Automatic and Continuous Self-Checking Circuitry



ST-15C-WX 4

DESCRIPTION

The Scully ST-15C-WX series multiple-point liquid-level detection control units are available in three through twelve channel models. The ST-15C-WX is commonly used to provide overfill protection, high level warning, low level warning and/or individual pump and valve control functions. They are well suited for multiple fixed storage tank and transport tank applications where individual display and/or output control is required.

The output control function may be reversed to alarm for a dry sensor condition rather than a wet sensor condition for low level warning.

The ST-15C-WX enclosure includes individual red indicator lamps that light when a sensor is wetted, a power indicator lamp, an alarm acknowledge push button and alarm test push button. Once a sensor alarm is acknowledged the alarm output circuit is reset, however, the indicator lamp remains lit until the sensor is dry again.

ST-15C-WX series controllers incorporate Scully's unique and exclusive Dynacheck® circuitry when connected to Scully sensors. Using pulsed signals to simulate a wet or "unsafe" condition, the monitor automatically and continuously checks the entire system operation; controller, wiring, connectors and sensors for faults thirty (30) times per second.

If liquid comes in contact with the sensor tip, or in the unlikely event a fault occurs, the pulsed signals cease and the monitor signals an audible alarm and/or controls pumps and valves for immediate shutdown.

Compatible liquid level sensors for the ST-15C-WX employ solid state thermistor and Instant-On optic sensing technology. Sensors and holders constructed of aluminum or stainless steel for sensing a wide variety of liquid products including petroleum and chemicals are available.



IEC 61508 Certified
SIL2 HFT=0
SIL3 HFT=1

FEATURES AND BENEFITS

- Incorporates Dynamic Self-Checking® circuitry which monitors the controller, wiring, connections and sensors for faults thirty times per second.
- Sounds an audible alarm and/or controls pumps and valves for automatic shutdown.
- Monitors from 3 –12 sensing points depending on model.
- Provides liquid-level detection for a wide variety of petroleum and chemical products.
- Use EN13922 compliant two-wire optic or thermistor sensors.
- Features NEMA 4 style watertight housings.
- Works in conjunction with either Scully field-proven thermistor or Instant-On optic sensors.



Multiple-Point Liquid-Level Detection System for High and Low Level Warning and Spill Prevention

TECHNICAL SPECIFICATIONS

Product Range: Gasoline through #6 oil, waste oil, chemicals, water, etc. Consult Scully for specific application questions.

Controls: Alarm test push button. Alarm silence circuit with push button and automatic reset.

Indicator Lights: Green= Power On.
Red= Alarm Condition.

Response Time: High-Level: 0.5 seconds maximum.
Low-Level: 3-7 seconds.

Enclosure: NEMA 4 style for indoor/outdoor use.

Power Requirements: 200-250 VAC, 50-60 Hz, 20 Watts per channel. Also available in 120 VAC models, consult Scully for details.


Electrical Connections: Internal Terminal Strips.

Output Provisions: External Alarm, 240 VAC 3A max. Individual channel SPDT contacts, 250VAC, 5A Max.

Approvals: Baseefa02ATEX0169U
II 1 G [Ex ia Ga] IIC
-40°C ≤ Ta ≤ +70°C



Unit must be located outside hazardous areas. Please contact our Customer Service Applications Department for a customized quotation for your specific application.

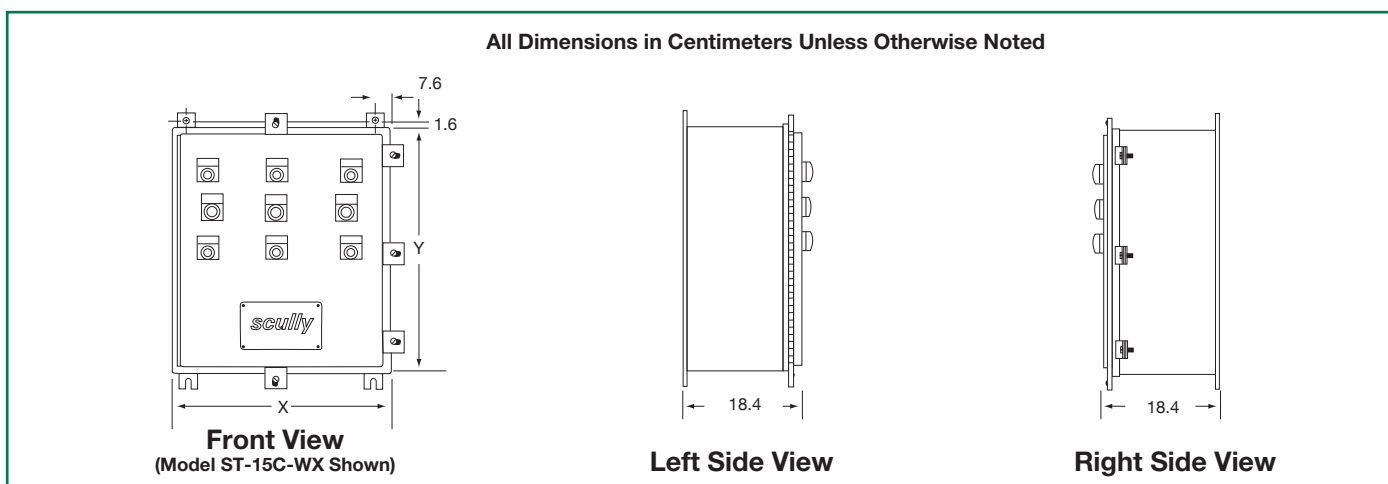

ORDERING INFORMATION

Description	DIM X		DIM Y		Depth		Part Number
	cm.	in.	cm.	in.	cm.	in.	
ST-15C-WX3, Three Channel/Sensing Point Control Unit	40.64	16"	60.96	24"	18.04	7.25"	08715
ST-15C-WX4, Four Channel/Sensing Point Control Unit	40.64	16"	60.96	24"	18.04	7.25"	08716
ST-15C-WX5, Five Channel/Sensing Point Control Unit	60.96	24"	76.20	30"	18.04	7.25"	08717
ST-15C-WX6, Six Channel/Sensing Point Control Unit	60.96	24"	76.20	30"	18.04	7.25"	08718
ST-15C-WX7, Seven Channel/Sensing Point Control Unit	60.96	24"	76.20	30"	18.04	7.25"	08719
ST-15C-WX8, Eight Channel/Sensing Point Control Unit	60.96	24"	76.20	30"	18.04	7.25"	08720
ST-15C-WX9, Nine Channel/Sensing Point Control Unit	60.96	30"	76.20	36"	18.04	7.25"	08721
ST-15C-WX10, Ten Channel/Sensing Point Control Unit	76.20	30"	91.44	36"	18.04	7.25"	08722
ST-15C-WX11, Eleven Channel/Sensing Point Control Unit	76.20	30"	91.44	36"	18.04	7.25"	08723
ST-15C-WX12, Twelve Channel/Sensing Point Control Unit	76.20	30"	91.44	36"	18.04	7.25"	08724

Copyright © 2023 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice. Viton® is a registered trademark of DuPont. Pyrex® is a registered trademark of Corning.

03-1A
June 2023



Scully Signal Company
800 272 8559
sales@scully.com
Wilmington, MA, USA

Scully Systems Europe NV
+32 (0) 15 56 00 70
sales@scully.be
Mechelen, Belgium

Scully UK Ltd
+44 (0) 1606 553805
sales@scullyuk.com
Winsford Cheshire, UK

Scully Systems India
+91 9821799566
salesindia@scully.com
Maharashtra, India

Dynamic Self-Testing® Overfill Prevention Systems

