


Ground Bolt and Ground Ball

For use with the Scully Intellitrol®
& ST-47 Groundhog Vehicle-Mounted Static Earthing Device

INTERNATIONAL
ATEX
PRODUCT
LINE



Ground Ball



Ground Bolt

Featuring Dynacheck® – Automatic and Continuous Self-Checking Circuitry

DESCRIPTION

If you load at terminals where the Scully Groundhog is incorporated with the existing Scully Overfill Prevention System, you need a Scully Ground Bolt on your vehicle. The Bolt is mounted directly to the vehicle frame and wired to the existing truck-mounted Scully Socket(s). This allows you to perform only one connection for overfill and earthing verification.

If you load at terminals which have a Scully Groundhog mounted independently at the gantry, you need a Scully Ground Ball mounted directly to your vehicle frame.

The grounding connection is completed with a special quick release plug and cable assembly that plugs onto the ball.

The Scully Ground Bolt and Ball contain “smart” electronic circuitry which offers an intelligent return signal to the Groundhog Control Monitor. This “smart” circuitry verifies that a proper connection is made before loading can begin. If the earthing connection is broken during loading operation, the operation ceases.


FEATURES AND BENEFITS

- Prevents loading until a proper static earthing has been established.
- Automatically shuts off the loading operation if the earthing is broken at any time during loading.
- The Ground Ball or Bolt can be installed easily.
- Provides intelligent earthing verification with self-proving connections to the Ground Ball and Bolt.
- Self-proving feature provides visible proof that a proper vehicle static earthing has been made and automatically permits loading.
- Suitable for tank cleaning and other applications where verifiable earthing is needed.
- Known for dependability, maximum safety and service common to all Scully Systems.

TECHNICAL SPECIFICATIONS


GROUND BOLT

Material: Stainless Steel, Stainless steel nut and lockwasher.
Thread Size: 1/2 –13 UNC
Pigtail Length: 1820 mm long
Installation Torque: 125 inch pounds maximum

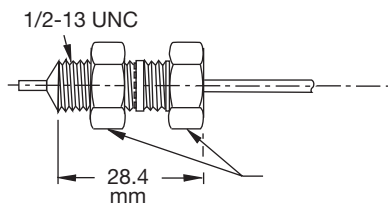

GROUND BALL

Material: Stainless Steel, Stainless steel nut and lockwasher.
Thread Size: 1/2 –13 UNC
Ring Lug: 6.3mm through hole
Pigtail Length: 304.0 mm long.

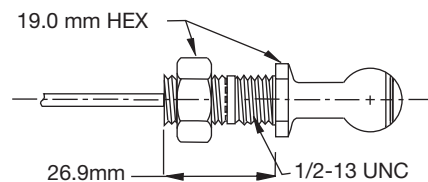

ORDERING INFORMATION

Description	Part Number
Ground Ball, for SC-47 Grounding System	08274
Ground Bolt, with M-20 Strain Relief	09011



MaxSafety®
SYSTEMS

Copyright © 2013 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol, Load-Anywhere are registered trademarks of Scully Signal Company. All Rights Reserved.
 Specifications are subject to change without notice.

67037 Rev F
November 2013

Scully Signal Company
 70 Industrial Way,
 Wilmington, MA 01887-3479, USA
 Tel: 800 272 8559 / 617 692 8600
 email: sales@scully.com

Scully Systems Europe NV
 Eksterveldlaan 31a
 2820 Bonheiden / Belgium
 Tel: +32 (0) 15 56 00 70
 email: info@scully.be

Scully UK Ltd
 Meridian House, Unit 33,
 Winsford Industrial Estate,
 Winsford Cheshire CW7 3QG / UK
 Tel: +44 (0) 1606 553805
 email: sales@scullyuk.com



Dynamic Self-Testing® Overfill Prevention Systems