


ScuL-Sense™ Stainless Steel High Pressure Chemical Sensor

ELECTRONIC
PRODUCT
LINE

Liquid Level Sensor for The Chemical Industries



Featuring Dynacheck® – Automatic and Continuous Self-Checking Circuitry



Chemical Sensor

The ScuL-Sense™ design is API/ATEX compliant and withstands temperature related stresses, dramatically improving reliability across a wide operating range.

DESCRIPTION

Scully ScuL-Sense™ stainless steel optic sensors are designed for Chemical product overflow prevention and point level detection.

They are designed to be used with the Scully Intellitrol®, ST-15, and/or ST-35 series loading rack control monitors. They can be used for overflow prevention on road tankers, rail cars and storage tanks.

These chemical sensors are available in either 2 wire or 5 wire versions. The sensors are a critical component in Scully's unique and patented Dynacheck circuit design. When used in conjunction

with Scully electronic monitoring equipment, our overflow protection sensor will provide consistent failsafe monitoring. By constantly checking a "closed loop" pulsing signal across the entire system, Scully ensures a safe and reliable loading operation. If rising fuel contacts the sensor, this signal is interrupted and the controlling pumps and valves are shutdown. No operator involvement is needed to end the loading operation.

Scully stainless steel chemical sensors are constructed of SS 316 Stainless Steel, Borosilicate (Pyrex® Glass) and SIMRIZ® O-rings and are compatible with a wide range of chemicals.*

FEATURES AND BENEFITS

- Maximum safety with Dynacheck— Automatic and continuous self-checking circuitry when used with Scully loading rack controls and vehicle onboard monitors.
- Usable to pressures of 600 PSI.
- Broad chemical compatibility.
- Wide Temperature Range.
- Shaft threaded inside and out and incorporates wrench flats.
- Fully compatible with Scully controllers.
- ATEX approvals per directive 94/9/EC.
- FM and CSA approvals for Class I, Division 1, Groups C and D hazardous locations.
- Meets requirements of API Recommended Practice RP-1004.
- Can be employed as part of a SIL system.



IEC 61508 SIL 3 Capable

2 Wire Model

$\lambda_{DU}=2.0 \text{ FIT}^*$ $\lambda_{SU}=110 \text{ FIT}^*$

5 Wire Model

$\lambda_{DU}=1.0 \text{ FIT}^*$ $\lambda_{SU}=116 \text{ FIT}^*$

*FIT = Failure In Time (1×10^{-9} failures per hour)

CHEMICAL COMPATIBILITY

Compatible products include:
(not a complete list)


- Gasoline
- Jet Fuel (JP3, JP4, JP5)
- Fuel Oils
- Oils
- Ethanol
- Alcohols
- Sodium Peroxide
- Hydrogen Peroxide
- Mineral Spirits
- Arsenic Acid
- Boric Acid
- Carbonic Acid
- Nitric Acid
- Acetic Acid Glacial
- Stearic Acid
- Methyl Ethyl Ketone (MEK)
- Phosphorus Trichloride
- Methyl Bromide

*NOTE: Compatibility is based on compatibility with sensor components. In rare cases, optical properties of the chemical may interfere with proper operation. Always perform operational tests before deploying.

MaxSafety®
SYSTEMS

Scully Signal Company / Tel. 617 692 8600 / Fax. 617 692 8620 / 800 2 SCULLY (272 8559)
70 Industrial Way, Wilmington, MA 01887-3479, USA / sales@scully.com / www.scully.com

67100 Rev E

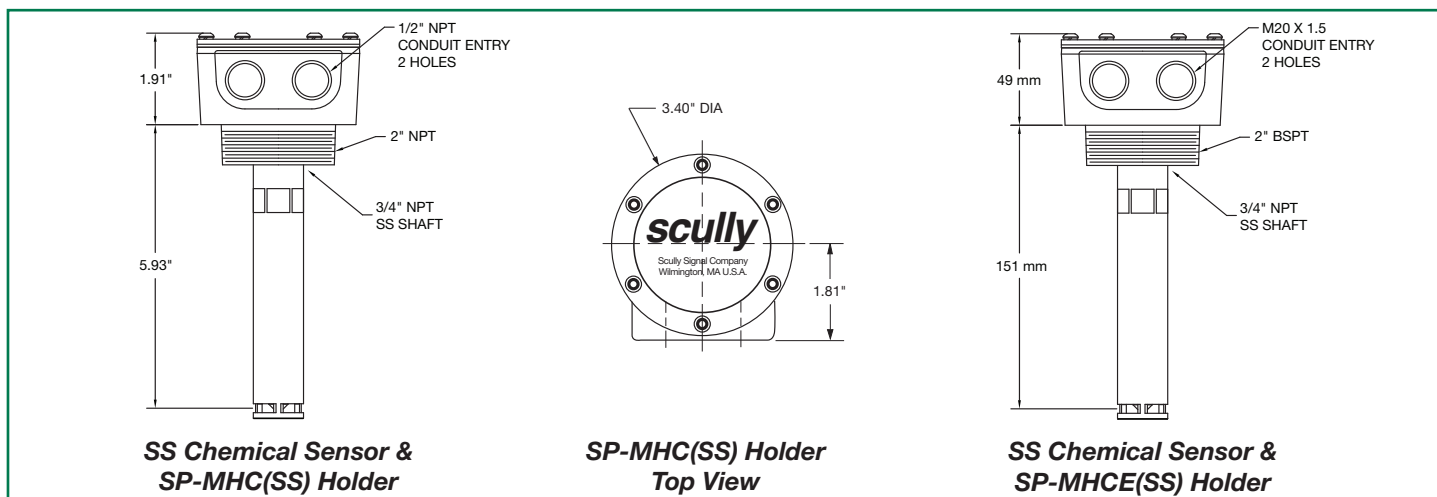

TECHNICAL SPECIFICATIONS

Temperature Range: -40° F to +140° F (-40°C to +60°C)
Product Range: Groups C & D hazardous materials and non-hazardous materials which are compatible with optic sensing technology. Consult the factory for specific chemical compatibility.
Exposed Materials: SS 316 Stainless Steel, Borosilicate (Pyrex®) Glass, SIMRIZ® Seal.
Detection Level and Size: Fixed, refer to diagram. The sensor may be adjusted to any length using 3/4" stainless steel pipe and a pipe coupling.
Level Repeatability: ±1/16" (1 mm)
Electrical Leads: 36" (45 cm) long Teflon insulated wires, 22 AWG (0.33 mm²)
Cable Entry: Two holes, 1/2" NPT threads.

Weight: Sensor: 15.5 oz (0.45 kg)
Holder: 2.8 lbs (1.27 kg)
Approvals: SIL Capable



North America:
The sensor is intrinsically safe for mounting in Class I, Division 1, Groups C and D Hazardous location in accordance with Scully Control unit approval ratings



International:
The sensor is intrinsically safe for mounting in Zone 0 according to ATEX Directive 94/9/EC Ex ia IIB T5 Ga (-40°C ≤ Ta ≤ +60°C)



ORDERING INFORMATION

Model	Description	Part Number
SP-TO(SS)	Two-Wire Optic Stainless Steel Chemical Sensor only	09375L1
SP-FU(SS)	Five-Wire Optic Stainless Steel Chemical Sensor only	09376L1
SP-FU(SS) "E"	Five-Wire Optic Stainless Steel Chemical Sensor only (EN13922 wire colours)	09376EL1
SP-MHC(SS)	Stainless Steel Holder assembly with 3/4" NPT thread (no sensor)	08585
SP-MHCE(SS)	Stainless Steel Holder assembly with 3/4" NPT, 2" BSPT, M20 (no sensor)	09477

Copyright © 2012 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

SIMRIZ® is a registered trademark of FREUDENBERG-NOK. Pyrex® is a registered trademark of Corning.

67100 Rev E
September 2012

scully

MaxSafety®
SYSTEMS

Scully Signal Company
70 Industrial Way,
Wilmington, MA 01887-3479, USA
Tel: 800 272 8559 / 617 692 8600
email: sales@scully.com

Scully Systems Europe NV
Eksterveldlaan 31a
2820 Bonheiden / Belgium
Tel: +32 (0) 15 56 00 70
email: info@scully.be

Scully UK Ltd
Meridian House, Unit 33,
37 Road One Winsford Industrial Estate,
Winsford Cheshire CW7 3QG / UK
Tel.: +44 (0) 1606 553805
email: sales@scullyuk.com

