




# NPT Nozzle Hose Swivels

Increased Hose Flexibility and Freedom of Movement

*Setting Standards in Safety and Dependability since 1936.*

## NPT Nozzle Hose Swivels for Non Scully Nozzles

- Advanced ball bearing design allows for easy rotation at all operating pressures.
- Teflon high recovery seal and shielded bearings for optimum field performance.
- No nipple required to attach hose with male style swivels.
- Lightweight aluminum and zinc construction.
- Wide variety of liquid product use.

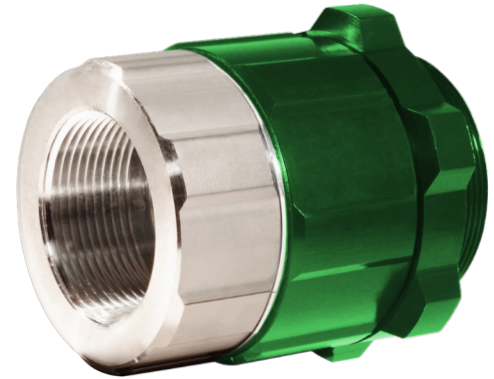

Inlet Style	Inlet Pipe Size	Male Outlet Thread	Part #
FEMALE	1 1/4"	1 1/4" Male NPT	05817
FEMALE	1 1/4"	1 1/2" Male NPT	05818
FEMALE	1 1/2"	1 1/4" Male NPT	05819
FEMALE	1 1/2"	1 1/2" Male NPT	05820
MALE	1 1/4"	1 1/4" Male NPT	05863
MALE	1 1/2"	1 1/4" Male NPT	05866
MALE	1 1/2"	1 1/2" Male NPT	05867
FEMALE	2"	2" Male NPT	05828
MALE	2"	2" Male NPT	05874

Copyright © 2019 Scully Signal Company. Dynachek, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, Golden Gallon, IntelliCheck, Intellitrol, Mark IV, Mark V, Sculclamp, Sculflow, Sculmatic, Twis-Lok, Unifil, Ventafil, Ventalarm, V.I.P. and Whistler are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

August 2019



**Scully Signal Company**  
 70 Industrial Way  
 Wilmington, MA 01887, USA  
 800 272 8559 • sales@scully.com

**Scully Systems Europe NV**  
 Maanstraat 25  
 2800 Mechelen, Belgium  
 +32 (0) 15 56 00 70 • info@scully.be

**Scully UK Ltd**  
 Meridian House, Unit 33  
 37 Road One Winsford Industrial Estate,  
 Winsford Cheshire CW7 3QG, UK  
 +44 (0) 1606 553805 • sales@scullyuk.com

